

WESTSTONE.CO.NZ









QUALITY LANDSCAPE PRODUCTS

Wetcast Patio Pavers







² weststone.co.nz | 0800 367 937 | Transforming your world...

WestStone Wetcast Patio Pavers

Style/	Sizes (mm)	Number per m²	Nominal Thickness (mm)	m² (Pieces) per Pallet	Colours in Stock (excl *)
in the second	CONTEMPORARY	2.77 3.13 3.7 4.93 5.55 11.11	37	14.44 (40) 12.16 (38) 10.81 (40) 12.17 (60) 14.41 (80) 12.15 (135)	Natural Slate Grey Sandstone Cream only available in
All and a state of the second	* 600x150	1.66 per l m	-	96.0 lm (160)	Natural Slate Grey
	600x600 450x450 600x300 300x300	2.77 4.93 5.55 11.11	37	14.44 (40) 12.17 (60) 14.41 (80) 12.15 (135)	Slate Grey Cream Natural
	SPLIT 450x450	4.93	37	12.17 (60)	only available in Slate Grey Cream
	STIPPLE 600x600	2.77	37	14.8 (40)	only available in Natural Slate Grey
	TRAVERTINE ▲ 600x450	3.7	37	10.81(40)	only available in * Cream * Sandstone

Tips:

- ✓ Lay on mortar for best results (pg. 41)
- ✓ Use Weststone Easy Grout (pg. 35)
- Download our laying guide from www.weststone.co.nz

Wetcast Features & Benefits:


- Slip resistant
- ✓ 10 year warranty
- High durability
- Adds serious value to your home
- Timeless style
- * Made to order. Minimum order quantity is 50m². Allow 4 weeks lead time. Nominal thickness may vary from 35-40mm. All wetcast patio pavers are recommended to be laid on mortar due to potential thickness variation and to achieve a level surface. Please read all info on pages 42/43 before purchasing Weststone products. Product installed/laid is deemed to be accepted.



WestStone Wetcast Patio



Colours and Inspiration!

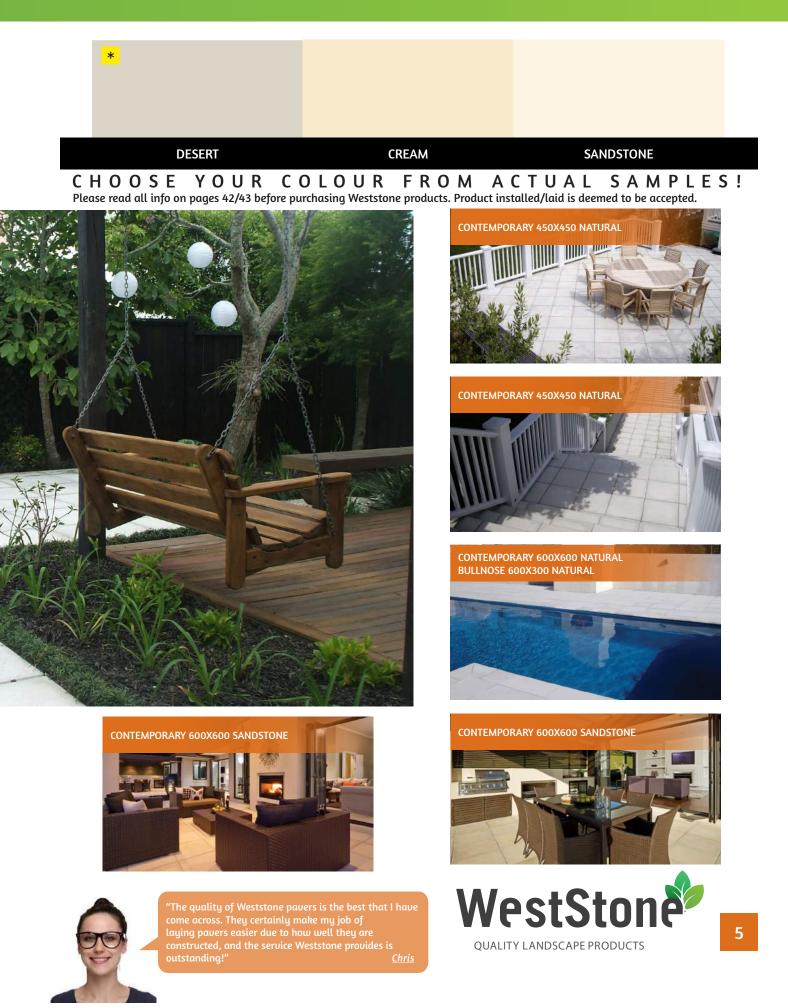

WestStone Wetcast Patio




"I just want to say what wonderful service I have received from your staff while embarking upon new paving and they have been a pleasure to deal with!"



"In terms of quality of pavers - we are very happy with the look of these, and delivery is all good!

We were particularly happy with the paver laying guy – he is very professional, with a high standard of workmanship and attention to detail." Nathan



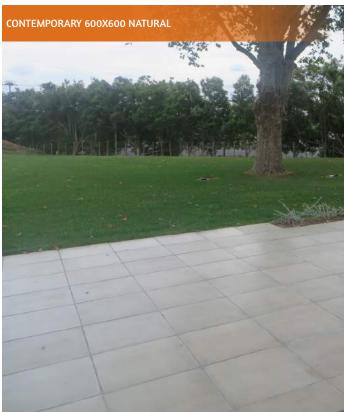

CONTEMPORARY 600X600 NATURAL & 600X150 SLATE GREY LIFESTYLE S/E 230X115 BLANCO BRICKS WESTSTONE SCHIST CORNERS



Inspiration!







"Thanks so much. It is very exciting. Weststone has been very easy to deal with so thank you." <u>Allison</u>




"Thank you for the exceptional service that your company has delivered to myself and my wife!

I will be highly recommending your product and service, as this is the best that we have been dealt with since moving from England nearly four years ago!" <u>Hadley</u>






"We enjoy using Weststone products, because from initial concept to finished result, Weststone is thoroughly professional throughout." WestStone QUALITY LANDSCAPE PRODUCTS

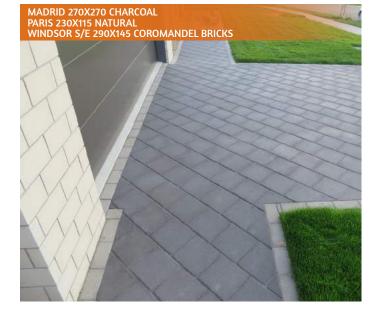






QUALITY LANDSCAPE PRODUCTS


Drycast Patio Pavers

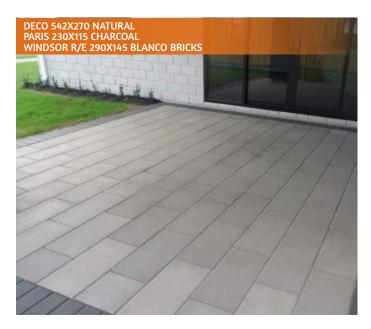

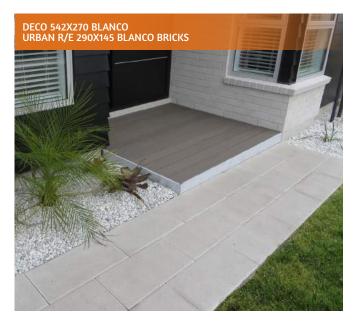





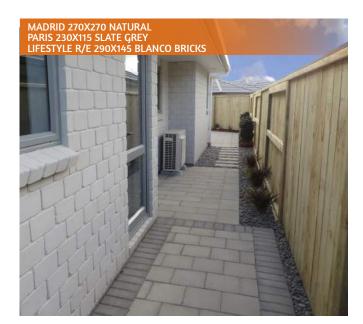

WestStone Drycast Patio Pavers

Style/S	izes (mm)	Number per m²	Nominal Thickness (mm)	m² (Pieces) per Pallet	Colours in Stock (excl *)
	VIENNA SIZE: 400x400	6.25	40	14.4 (90)	Charcoal Slate Grey Natural Midnight Blanco
	DECO SIZE: 542x270	7	40	12 (84)	Charcoal Slate Grey Natural
	MADRID SIZE: 270x270	14	40	12 (168)	Charcoal Natural
	LONDON SIZE: 230x190	23	40	14.8 (340)	Charcoal Natural
	PARIS SIZE: 230x115	38	40	14.47 (560)	Charcoal Natural

Tips:

- ✓ Use Weststone Sweep-In Grout (pg. 34)
- Lay on compacted base course (pg. 39)
- Download our laying guide from www.weststone.co.nz


Drycast Features & Benefits:

- No weeds or ants (using sweep-in grout)
- 🗸 10 year warranty
- ✓ Minimal colour variation
- Slip resistant
- ✓ Minimal Efflorescence
- Made to order. Minimum order quantity is 50m². Allow 4 weeks lead time. Please read all info on pages 42/43 before purchasing Weststone products. Product installed/ laid is deemed to be accepted.




9


WestStone Drycast Patio

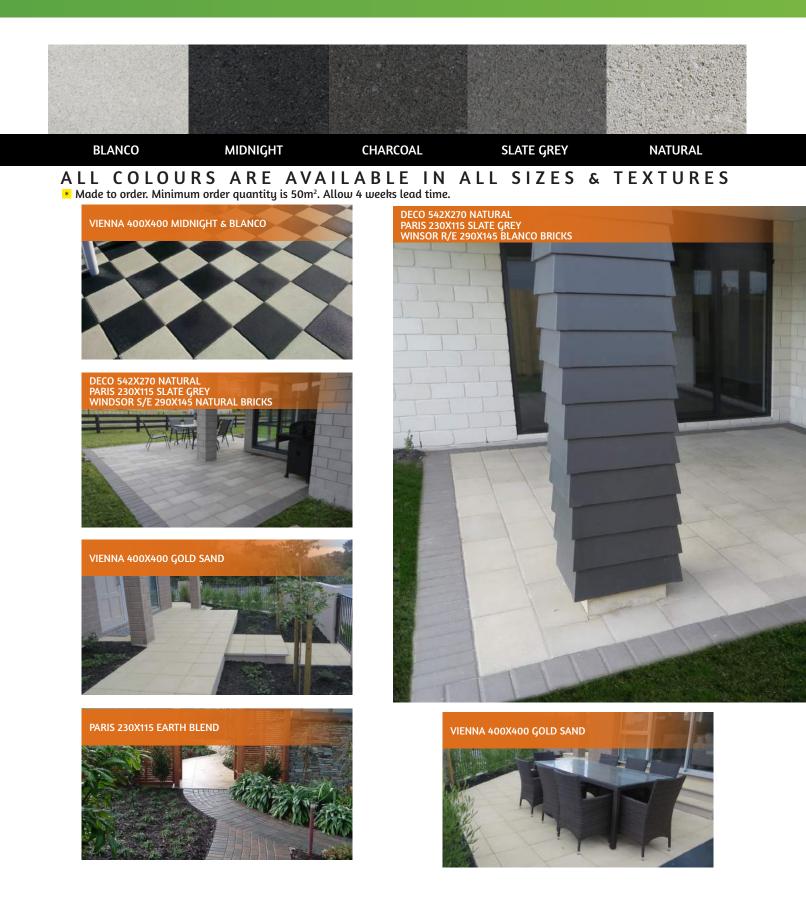

Colours and Inspiration!

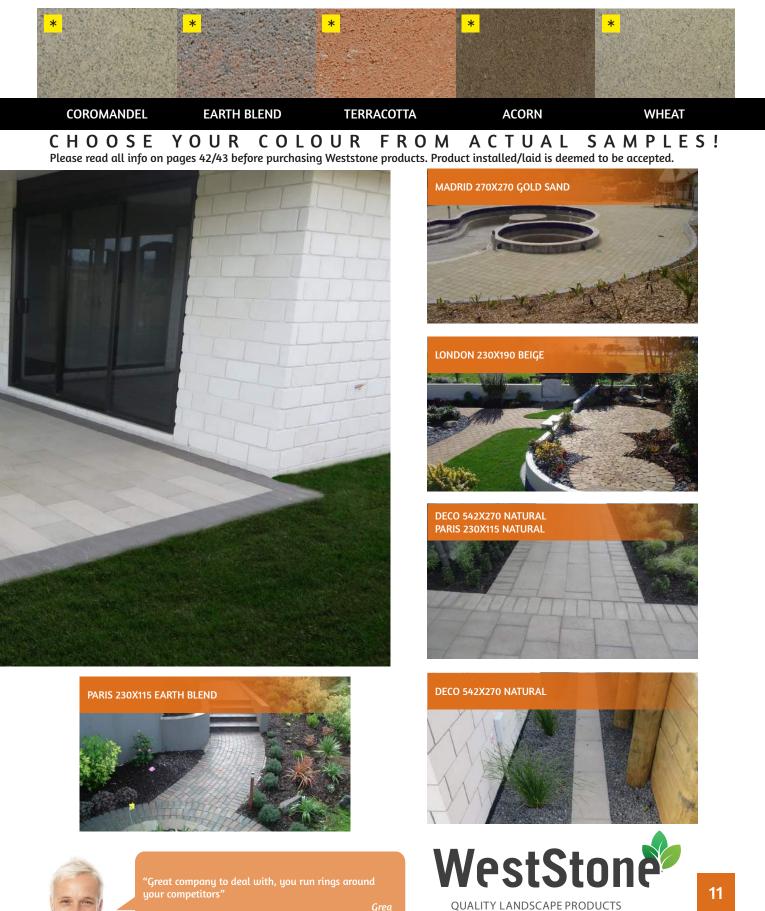

WestStone Drycast Patio Colours and Inspiration!

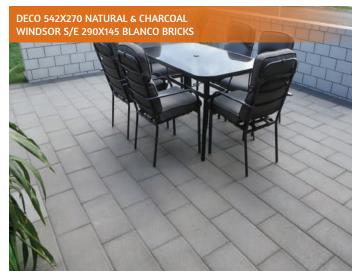












WestStone Honed Patio Pavers NEW!

Style/S	izes (mm)	Number per m²	Nominal Thickness (mm)	m² (Pieces) per Pallet	Colours Available *
	VIENNA HONED SIZE: 400x400	6.25	38	14.4 (90)	Natural * Blanco Charcoal * Midnight * Slate Grey

IMPORTANT NOTICE: All honed pavers must be washed & sealed after installation. Use Weststone Gloss Sealer or Weststone Stone & Concrete Sealer (Page 34). Also keep pavers clean during install as the surface is porous & will stain.

* All other colours, allow 4 weeks lead time. Minimum order quantity is 50m².





VIENNA HONED BLANCO

VIENNA HONED SLATE GREY











QUALITY LANDSCAPE PRODUCTS

Drycast Driveway Pavers





PARIS 230X115 CHARCOAL & NATURAL



WestStone Drycast Driveway Pavers

Style/S	izes (mm)	Number per m²	Nominal Thickness (mm)	m² (Pieces) per Pallet	Colours in Stock (excl *)
	LONDON SIZE: 230x190	23	60 * 80	9.7 (244) 8.5 (195)	Charcoal
	MADRID SIZE: 270x270	14	60	10.28 (144)	Charcoal
	PARIS SIZE : 230x115	38	60 * 80	10.52 (400) 8.42 (320)	Charcoal Natural
*	NAPOLI	19	60	10.10 (191)	N/A
*	EASYFLOW PERMEABLE PAVER	47	60 80	10.6 (224) 8.5 (195)	N/A
*	DRIVE KERBS SML : 255x120 MED : 600x120 LRG : 550x190	4.0 L/M 1.7 L/M 1.8 L/M	75 75 80	65 L/M (250) 79 L/M (134) 44 L/M (79)	N/A

Tips:


- ✓ Use Weststone Sweep-In Grout (pg. 34)
- Lay on compacted base course (pg. 39)
- Download our laying guide from www.weststone.co.nz

Drycast Features & Benefits:

- No weeds or ants (using sweep-in grout)
- 🗸 10 year warranty
- Minimal colour variation
- Slip resistant
- Minimal Efflorescence
- Made to order. Minimum order quantity is 50m². Allow 4 weeks lead time. Please read all info on pages 42/23 before purchasing Weststone products. Product installed/laid is deemed to be accepted.



WestStone Drycast Driveway

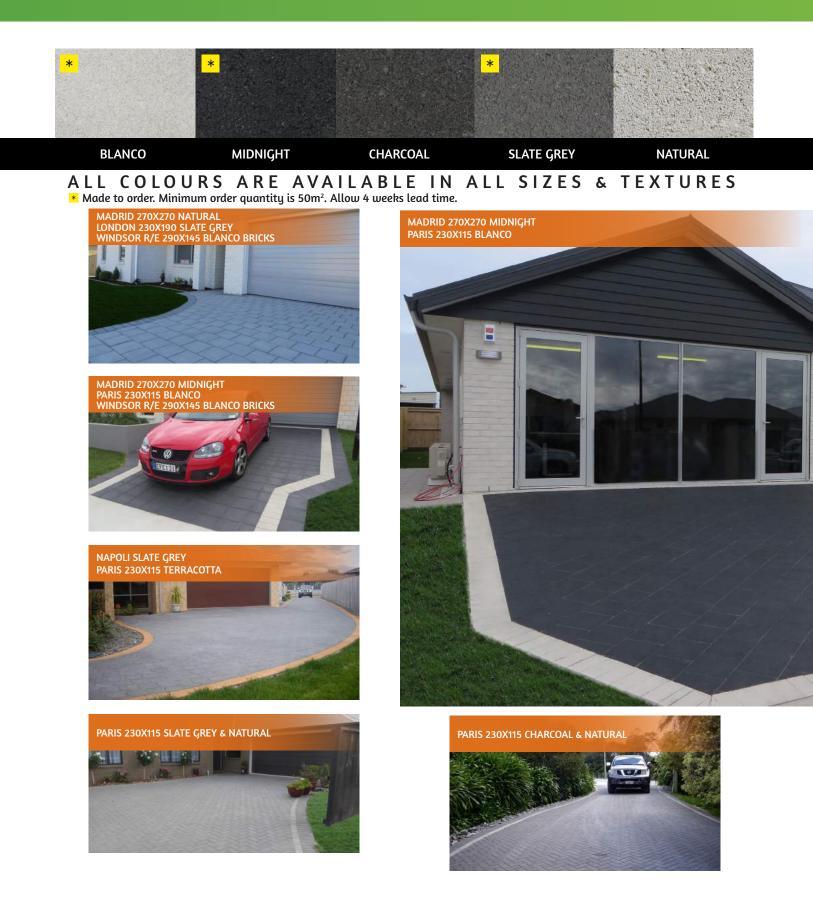

Colours and Inspiration!









QUALITY LANDSCAPE PRODUCTS

Retaining Walls







¹⁸ weststone.co.nz | 0800 367 937 | Transforming your world...

WestStone Retaining Walls

Style/Size	25 (mm)	Number per m²	Number per Pallet	m² per Pallets	Colours in Stock (excl *)
LANDSCAPE WALL	B 270 270	46	128	2.78	Charcoal Blend Charcoal
LANDSCAPE WALL CAP DRYCAST	270 210	3.7 per lineal metre	168 or can be added to block pallets	-	Charcoal





Choose from actual samples.

Made to order. Minimum order quantity is 50m². Allow 4 weeks lead time. Please read all info on pages 42/23 before purchasing Weststone products. Product installed/laid is deemed to be accepted.



WATERWORN STEPPERS & SUPER SLABS









QUALITY LANDSCAPE PRODUCTS

Schist Range

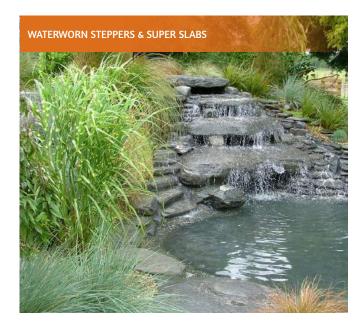



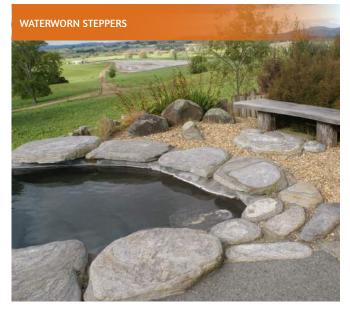

²⁰ weststone.co.nz | 0800 367 937 | Transforming your world...

WestStone Schist Range

Style	No per Pallet	
	ALPINE FEATURE ROCK 300-400	28
	ALPINE STEPPER 300-600	100
	WATERWORN STEPPER 300-500 500-600 * 600-800 * 800-1200 * 1200-1500 * 1500+	100 50 20 10 4 1
	WATERWORN GARDEN EDGE 200-300	200
	WESTSTONE SCHIST WALLING & CORNERS	1 tonne
	* HARI SCHIST WALLING & CORNERS	1 tonne
	SPLIT SCHIST PAVING 300-500	10m²

WATERWORN STEPPERS









 Made to order. Minimum order quantities apply. Allow 4 weeks lead time. Please read general info at back of brochure before purchasing. Product installed/laid is deemed to be accepted.

"The samples arrived yesterday!! Amazing service, thank you so much!"

<u>Kylie</u>




21

WestStone Schist Range




FEATURE ROCKS, SUPER SLABS & WATERWORN STEPPERS

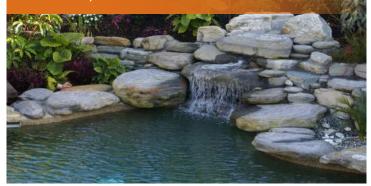



SCHIST NATURAL BRICKS

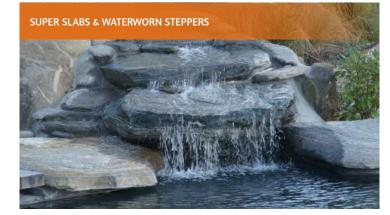





Inspiration!







SCHIST NATURAL BRICKS





SCHIST SOURCE

ALL PHOTOS COURTESY OF





WestStone Schist Range







WESTSTONE SCHIST WALLING & CORNERS








Inspiration!









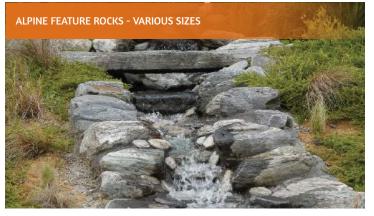













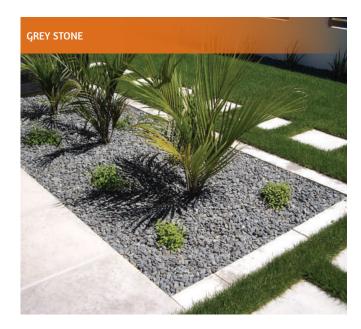




QUALITY LANDSCAPE PRODUCTS

Decorative Stone





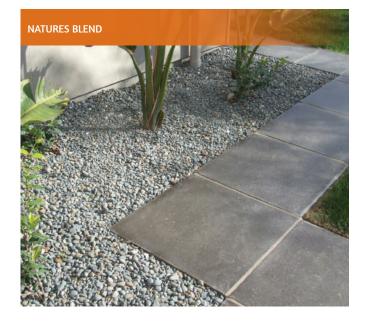

²⁶ weststone.co.nz | 0800 367 937 | Transforming your world...

WestStone Decorative Stone



RUSTIC STONE SMALL - 7-12M M



RUSTIC STONE MEDIUM - 12-25MM




NZ WHITE STONE MEDIUM - 6-16MM



GREY STONE SMALL - 7-12MM



GREY STONE MEDIUM - 20-40MM



ALPINE NUGGETS MEDIUM - 30-80MM



AVALANCHE STONE SMALL - 8-14M M



AVALANCHE STONE MEDIUM - 14-22MM



OCEAN FLAT STONE MEDIUM - 30-80M M



Available Bag Sizes:

- 15kg (excludes Alpine Nuggets)
- 500kg
- 1,000kg
- Made to order. Minimum order quantities apply. Allow 4 weeks lead time. Please read general info at back of brochure before purchasing. Product installed/laid is deemed to be accepted.







QUALITY LANDSCAPE PRODUCTS

Bulkbag Range

- 500kg (excludes washed sand)
- 1000kg



WHY USE BULK BAGS?

- TIDY no messy piles of stone or sand on your driveway!
- ✓ NO WASTAGE more profit!
- SAVE TIME minimal clean up time for you!
- GREAT for hilly or difficult access sites
 simply hiab bag onto site.
- Hiab/Crane delivery into spots you can't get a trailer - saves install time for you!
- Hassle FREE keeps your section tidy throughout the project.
- SAVES room/space no messy spread out piles

weststone.co.nz | 0800 367 937 | Transforming your world...

Style/S	Style/Sizes (mm)		
	LANDSCAPE EDGE STRAIGHT 500 x 100	100	
	LANDSCAPE EDGE CURVE 500 x 100	96	
	LANDSCAPE KERB STRAIGHT 500 x 100	80	
5	LANDSCAPE TREE RING 1/2 Round 300 Ø	104	
6	LANDSCAPE TREE RING 1/2 Round 450 Ø	80	
	LANDSCAPE TREE RING 1/2 Square 450	96	
	LANDSCAPE STEPPING STONE 300	90	



Nominal thickness may vary from 40-50mm. Please read general info at back of brochure before purchasing. Product installed/laid is deemed to be accepted.

NATURAL



QUALITY LANDSCAPE PRODUCTS

Tree Rings/ Garden Edges





"We are extremely pleased with the end product and love the new look of our pavers...!! Thank you once again for your wonderful customer service" WestStone QUALITY LANDSCAPE PRODUCTS







QUALITY LANDSCAPE PRODUCTS

House Bricks








³⁰ weststone.co.nz | 0800 367 937 | Transforming your world...

WestStone House Bricks

Style	Size (mm)	Number per m²	m² per Pallet	Number per Pallet
WINDSOR BRICK	290W x 145H x 70 D	22	10.18	224
LIFESTYLE BRICK	230W x 115H x 70 D	33	12.12	400
URBAN BRICK	290W x 90H x 70D	33	11.82	390

Most bricks made to order. Allow 3-6 weeks lead time depending on season. Please read general info at back of brochure before purchasing. Product installed/laid is deemed to be accepted.

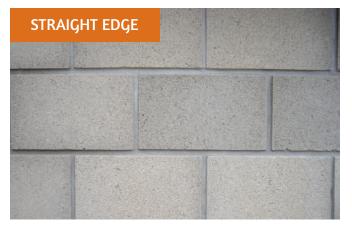



Tips:

- ✓ Use Weststone White or Grey Cement
- ✓ Mortar Match Darker Colours
- ✓ Keep clean during laying

Brick Features & Benefits:

- Lifetime warranty
- Minimal colour variation
- ✓ Straight & true dimensions
- Colour fast Colour right the way through



31

WestStone House Bricks




Allow 3-6 weeks lead time depending on season.

* These colours available in windsor brick size only.





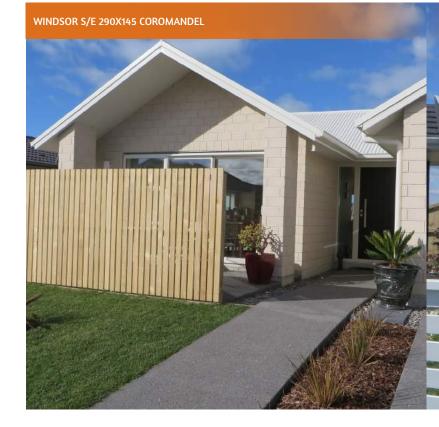





Colours and Inspiration!



CHOOSE YOUR COLOUR FROM ACTUAL SAMPL Please read general info at back of brochure before purchasing. Product installed/laid is deemed to be accepted.











"We get positive feedback from our clients all the time when we use WestStone Bricks. We decided to use them after seeing how good they looked on other homes that had used them."





Kei



MORTAR MIX

Instant mortar mix - just add water

Contains washed, graded sand, cement and plasticizer. When water is added this mixture produces a high quality mortar suitable for concrete pauers, bricks and blocks and clay bricks. **AVAILABLE IN 30KG BAGS**



ACID WASH

For use as a paver cleaner after installation and before sealing

When pavers, concrete or bricks lose their original beauty and dirt becomes embedded in the surface and before you seal your patio or driveway for the first time, it is necessary to acid wash your product. ACID WASH makes this process simple and easy with clear instructions to follow. ACID WASH will restore your pavers, concrete or bricks to their former glory.

AVAILABLE IN 4 LITRE CONTAINERS



QUALITY LANDSCAPE PRODUCTS

Additional Products

EASY GROUT

FOR WETCAST AND SANDSTONE PAVERS ONLY! A ready-to-use, all-weather paving

joint compound that is brushed into joints and left to air cure. Suitable for wetcast and sandstone paving for pedestrian traffic.

AVAILABLE IN 12.5KG CONTAINERS.

GLOSS SEALER

Use this sealer if you require superior protection from water, oil and grease. This sealer will give your pavers a "wet look"- so they will appear darker than the original colour. This sealer can also be used for most paving, concrete driveways and patios and natural stone materials.

AVAILABLE IN 5, 10 AND 20 LITRE CONTAINERS







STONE AND CONCRETE SEALER

Use this sealer if you require protection from water, oil and grease whilst retaining the original look and feel of the paver. This sealer can also be used for most paving, concrete driveways and patios and natural stone materials.

AVAILABLE IN 5, 10 AND 20 LITRE CONTAINERS



SWEEP-IN GROUT

FOR DRYCAST PAVERS ONLY!

Hardens with moisture Specically formulated using graded washed sand and additives to allow rapid filling of all vertical joints in segmental paving. It is a jointing material that generally conforms to guidelines set out by the Clay Brick and Paver Institute's 'Design Manual One for Segmental Paving Units'. SWEEP-IN GROUT is suitable for use in the following situations: driveways, footpaths, heavy traffic areas, sloping sites, high wind areas, roadways, airport standing areas, and surfaces where mobile vacuum sweepers are used.

AVAILABLE IN 30KG BAGS

WestStone Easy Grout

All Weather Paving Joint Compound! 20 times faster than traditional pointing!!

Here is an outline of the 7 most important advantages of using Easy Grout over tradiational sand and cement mortar pointing in paving joints:

- Speed & Efficiency Reduces labour time and therefore cost.
- Ease of use Doesn't require skilled or expensive labour and no more kneeling or bending.
- High Strength Epoxy resin products suitable for medium to heavy traffic loads.
- Frost Resistance Very frost resistant and resistant to extreme changes in temperature.

• *Weather during application* Fast to use so only a short window of opportunity required and being applied to damp paving means that inclement weather is not a problem. Application temperatures from 0°C to +30°C possible and will not develop cracks like sand and cement due to drying out too quickly in the sun.

• *Professional* Consistent results can be obtained very easily every time with correct colour matching and finish. No cement staining and no returning for cleaning once the job is complete!









The quick and easy solution to filling joints between paving slabs and setts, suitable for natural stone and concrete paving. So simple to use, Weststone Easy Grout allows an untrained hand to consistently deliver perfect joints every time - whatever the weather!

Available in two colours - **Natural** and **Grey**. It delivers a weed free, frost resistant joint, without staining the paving - **SAVING YOU TIME AND MONEY**.

- Suitable for use in wet weather
- Professional strength
- Premixed, ready to use
- Cement free
- Suitable for pedestrian traffic, ideal for paths & patios
- **Perfect for DIY use**





CALL NOW FOR FREE QUOTES OR ADVICE

0800 367 937 SALES@WESTSTONE.CO.NZ WWW.WESTSTONE.CO.NZ



QUALITY LANDSCAPE PRODUCTS

WestStone Helpful Calculators

Cement, Sand & Oxide Quantities - per m²

	Windsor Brick 290 x 145 x 70	Lifestyle Brick 230 x 115 x 70	Urban Brick 290 x 90 x 70
	per m²	per m²	per m²
Cement (kg)	2.7	3.5	4.2
Sand (m³)	0.011	0.012	0.013
Oxide (kg)	0.17	0.21	0.25

Base Course Calculator 1m³ = 1.6 Tonne Example:

Area (m²)	40.0		
Thickness (m)	0.100		
Volume (m³)	4.0		
Plus Compaction %	1.30		
Total Volume (m³)	5.2		
Base Course Required (Tonne)	8.3		

GAP20 Calculator 1m³ = 1.48 Tonne

Example:				
Area (m²)	40.0			
Thickness (m)	0.100			
Volume (m³)	4.0			
Plus Compaction %	1.00			
Total Volume (m³)	4.0			
Base Course Required (Tonne)	5.9			

Mortar Mix Calculator 1m² = 25kg Example:

-	
Area (m²)	1.20
Mortar Mix Required (kg)	30.00
Bag Size (kg)	30
Total Number of Bags	1.0

Acid Wash Calculator

1m² = 0.05 Litres Example:

Example.		
Area (m²)	80.0	
Acid Wash Required (L)	4.00	
Bottle Size (L)	4	
Total Number of Bottles	1.0	

Sweep in Grout Calculator

1m² = 3kg Example:

Lxample:		
Area (m²)	50.00	
Sweep In Grout Required (kg)	150.00	
Bag Size (kg)	30	
Total Number of Bags	5.0	

Easy Grout Calculator

Approx coverage per 12.5kg tub

Joint Size:	600x600mm Pavers	450x450mm Pavers	100x100mm Setts
5mmx30mm deep	15.6m²	11.4m ²	2.5m ²
10mmx30mm deep	7.8m²	5.7m²	1.3m ²
15mmx30mm deep	2.5m²	3.8m²	0.85m ²

*These calculations are approximates only. Not all variables are taken into consideration. Only to be used as a guide.


WestStone How to Choose your Pavers and Achieve the Look you Desire

DRYCAST AND WETCAST PAVERS


STEP 1.

Measure your area to be paved to determine quantity of pavers required. This area is simply calculated by length (m) x width(m) = area (m2) for basic square or rectangle spaces (m=meters).





Example: ½ of 4m = 2m x 3m = 6m2



STEP 2.

Select the paver size that you prefer. Your choice will depend on the look you wish to achieve. Also check out our '**GENERAL TIPS**' below.

STEP 3.

Select a colour that complements your area, home and surroundings.

STEP 4.

Choose to D.I.Y (DO IT YOURSELF) or hire a professional contractor. Refer to pages 39 and 41 for a basic guide to laying your Weststone Pavers.

TO LOCATE YOUR NEAREST STORE SIMPLY CALL 0800 367 937

GENERAL TIPS

TIP1. Select pavers that match internal floor coverings to ensure the transition from indoor-out is subtle and blends with your decoration style.

T I P 2 . If paving around pools or building steps, choose from our bullnose range to create a smooth finish.

TIP3. Combining large and small format pavers can add textural qualities for a more distinctive space.

TIP4. When paving a small space, keep the design simple and use a neutral coloured, large format paver to create a sense of space.

T I P 5 . Large format pavers, such as 450 x 450mm speed up the laying process.

TIP6. Lighter coloured pavers make a shady area seem much brighter and warmer.

T I P 7 . Darker colours add contrast and interest to your outdoor areas.


TIP8. Once your Weststone Pavers are laid, use **WESTSTONE-GLOSS SEALER** to maintain a 'just laid look'. This will also help prevent fading, staining and efflorescence. We recommend that you hire a professional for this process.




WestStone Your Guide to Sizes and Design

DRYCAST AND WETCAST PAVERS

FOR SQUARE PAVERS ONLY






DIAMOND




STACK BOND WITH


CONTRASTING BORDER







600x600, 600x300, 300x300 (1.6 of each size per m²)



DUTCH DESIGN


600x600, 300x300, (2.23 of each size per m²)


SPECIAL DESIGNS FOR CONTEMPORARY AND CLASSIC PAVERS **ONLY** (WETCAST)

FOR RECTANGULAR PAVERS ONLY




STRETCHER BOND






45° STRETCHER BOND WITH FLAT HEADER COURSE







WestStone How to Lay your Drycast Pavers

STEP1.















SIEP 1.

For light pedestrian use on well consolidated ground, excavate the depth of the pavers plus 50mm for the WESTSTONE-BASE-COURSE layer. For heavy garden equipment, vehicle traffic, hard standing or poor ground – a sub base of 150 - 200mm depth is required. The sub base should be well compacted and consist WESTSTONE-GAP-20 or similar (not larger than 25mm aggregate). Provide a fall of 10 - 15mm over every 1 metre to allow for water runoff. The falls should be away from the house or walls unless linear surface drainage channels are used. Building regulations require paving to be a minimum height below the floor level. Check your local building regulations for this information.

STEP 2.

Any area of pavers must be surrounded by a firm edge restraint to stop the blocks and sand from moving sideways. New and existing walls, kerbs or the pavers themselves laid on a suitable concrete bed can all be used to serve this purpose. Any concrete used to fix edge restraints must be allowed time to cure and gain strength before any vibration is commenced.

STEP 3.

After sub base excavation and fill (if required) screed out WESTSTONE-BASECOURSE on top of the sub base within the restrained area to an approximate depth of 65mm. Then compact with a plate compactor (obtained from you local hire shop). Then spread WESTSTONE-WASHED-SAND over at approx 5-10mm thickness and screed off to give a firmly compacted thickness of 50mm. One tonne of WEST-STONE-BASE-COURSE covers approximately 8m².

STEP 4

Individual pavers are then simply placed onto the sand bed and according to the pattern, laying progresses from a corner or long edge and should proceed along one laying face until work is finalised. Pavers from several packs should be well mixed to enhance colour blending.





STEP 5.

Cutting of pavers may be required to fill gaps between edge restraints. This may be done using a hammer and bolster chisel. If a lot of cutting is necessary, a mechanical block splitter or power cutter can be hired.



With a stiff broom, thoroughly brush WESTSTONE-SWEEP-IN-

GROUT over the pavers to fill the joints before compacting. For smaller areas use a rubber mallet to compact. For larger areas use a plate compactor. Carpet may be required when compacting these pavers to help prevent them from cracking. Keep sweeping WESTSTONE-SWEEP-IN-GROUT in until all joints are topped up. Sweep in thoroughly to avoid staining during spraying. Then spray a fine mist of water over the area to help set the grout. ONLY USE SMALL AMOUNT OF WATER

STEP 7.

To maintain a just laid look, you can seal your pavers using either WESTSTONE-SEALER product of your choice. Talk to your local Weststone distributor about WESTSTONE-SEALER for your pavers. Unsealed paving will weather naturally making colours appear less intense.

STEP 7.

Step back - relax and enjoy the finished result.

WHAT YOU NEED: CHECKLIST

- PAVERS: Calculate required amount Granular fill for the sub base use:
- □ WESTSTONE-BASE-COURSE (Bagged)
- □ WESTSTONE-WASHED-SAND (Bagged)
- □ WESTSTONE-SWEEP-IN-GROUT (Bagged)
- WESTSTONE-READY-TO-MIX CONCRETE (Bagged)
- □ Shovel, spade and rake
- □ Tape measure □ Level
- □ Stakes and stringline □ Gloves and earmuffs
- □ Compactor □ Wheel barrow
- □ Straight edge/screed
- □ Bolster or paving saw to cut pavers

NOTE: Most Weststone bagged products are available in 20kg, 500kg and 1000 kg bags.



QUALITY LANDSCAPE PRODUCTS

WestStone How to Install your Landscape Wall



1. Mark out and dig trench



3. Level and compact GAP 7



5. Lay drain coil and drainage aggregate



7. Check levels



9. Place capping stones on and glue down if you wish



2. Fill trench with WESTSTONE-BASE-COURSE



4. Lay first layer



6. Lay second layer, continue laying and check levels



8. Backfill with drainage aggregate and soil as you go



10. Enjoy the beautiful finished result!

STEP 1. SITE PREPARATION AND EXCAVATION

Dig out the area behind where your wall will go to allow for drainage and back fill. Then dig a trench 500mm wide and 200mm deep along the line of your walls planned base.

STEP 2. PREPARE A LEVEL BASE

Compact the soil in the base of your trench. Then fill trench with WESTSTONE-BASE-COURSE or similar and compact evenly. Check with a string line and spirit level to ensure your wall will be built on a solid, level base.

STEP 3. INSTALL THE FIRST LAYER

You must ensure the first layer is perfectly level. Place the blocks onto the base and tap with rubber mallet. As you lay the first layer – check that it is level from side to side and back to back. Check the back of the first layer with string line. On a sloping site, step the trench in 100mm increments to ensure blocks remain level. Always start laying your wall from the lowest point and work uphill.

STEP 4 . DRAINAGE

If your wall is going to be 3 layers or more high, then place a "punched"drainage coil behind the first layer of blocks. Extend the coil away from the wall and connect to the nearest silt trap. Cover the coil with drainage aggregate.

STEP 5. STACKING AND BACKFILLING

Brush the first course clean and place the second course in a stretcher bond pattern. Ensure the nibs of the upper block engages with the back of the bottom block to prevent movement. As each layer is finished, place drainage aggregate and backfill behind the wall and compact the back fill every 2 courses. Continue until finished height is achieved. Then place capping stones on the wall to finish off. (These can be glued down with construction adhesive if you desire)

WestStone How to Lay your Wetcast Pavers

PATIOS ONLY

THIS method will HELP overcome problems such as ants, weeds, sinking, and separating



STEP 1 . Digout topsoil to 120mm. Install WESTSTONE-BASECOURSE and rake out



STEP 2 . Compact base course to 60mm thick using feet or preferably plate compactor.



STEP 3

Check levels with tape measure. Your base course should be approx 60mm below the finished level of your paving.



STEP 4 . Check levels with spirit level.



STEP 5

Mix WESTSTONE-MORTAR-MIX with water to toothpaste consistency (in a wheelbarrow or mixer) or mix WESTSTONE-WASHED-SAND with cement, water and plasticiser - sand and cement can be ordered from Weststone.



STEP 6 . Trowel 5 spots of mortar mix onto base course. Then lay a strip of mortar where the next joint will be.



the spots (the mortar should squash down and spread out to 20mm thick. Use a sponge to wet the back of each paver before you lay.



Gently tap paver down to desired level with rubber mallet. Joints should be approx 10mm wide at top of paver.

DO NOT BUTT HARD TOGETHER.



STEP 9 . Check levels across pavers continuously and tap down if needed.



STEP 10 . You should end up with approx 40mm paver, 20mm mortar, 60mm base. When all pavers are laid -DO NOT WALK ON FOR 24 HOURS.



STEP 11.

Wet the surface of the pavers and pour on the Weststone Easy Grout. Wet the grout throughly and sweep into the joints. Only grout 4-5m² at a time. Ensure the grout is a wet slurry!



Sweep off the remainder of the grout 45 degree to the grout lines.



Only seal if required.

PAVERS MUST BE 100% DRY BEFORE SEALING.



QUALITY LANDSCAPE PRODUCTS

WestStone General Info

TERMS AND CONDITIONS

In the unfortunate but unlikely event of products reaching you in less than satisfactory condition, please notify the retailer immediately.

PLEASE NOTE: Whilst every effort has been made to give sound advice, Weststone can take no responsibility for any loss, damage or injury sustained in following it, neither can Weststone accept any liability in respect of products being used for any purposes other than those for which they were intended by the manufacturer. Weststone cannot accept any liability for quality of installation of pavers or interpretation of the laying guide as these procedures are beyond Weststone control. Weststone recommends that all products are installed by specialist approved installers.

EFFLORESCENCE

All concrete products may, in their early life, appear to lose some intensity of colour and experience a milky-white stain on the face of the product. This is efforescence staining. It is a temporary phenomenon and is in no way detrimental to the performance of the material and responsibility cannot be accepted for its occurrence. Clay products may also suffer from a temporary white stain called efforescence. This is quite different from efforescence in concrete products and is caused by soluble salts within the clay being transported by water to the surface as they dry out. Responsibility cannot be accepted for its occurrence. For further information on efforescence staining in both clay and concrete products, please call.

COLOUR VARIATION

The colours shown in this literature are as exact as photographic and printing processes will allow. We strongly recommend that colours are judged and chosen from actual materials rather than photographic representation depicted herein. Although every effort is made to ensure consistency of product colour, variations between production batches can occur. We therefore recommend that, when purchasing materials, especially in the case of larger quantities, they all come from the same batch and that products are thoroughly mixed onsite by drawing from a minimum of three packs. All natural stone Sandstone products vary with differing geological conditions. Such variations can lead to small particles of ironstone within the product creating a darkening of the surface during natural weathering.

MAINTENANCE

Paving materials require periodic cleaning to maintain their appearance. Regular sweeping to prevent the build-up of detritus is recommended. Light coloured blocks, whilst structurally sound for driveway use, are liable to emphasise tyre marks and oil spills on the driveway. It must be accepted that these products will need more maintenance if the overall appearance is to be maintained. Proprietary cleaning agents are widely available and details of these can be obtained through Weststone, please phone 0800 367 937. Care should be taken when buying cleaning agents as some varieties contain a concentration of acid, which can adversely affect the appearance of concrete products, clay and natural stone. For general cleaning of dirt and algae, vigorous brushing with a stiff yard broom with plenty of hot detergent solution (washing up liquid or non-bio washing powder), thoroughly rinsed with clean water should suffice. Repeated treatment maybe required for paved areas sited beneath trees or in permanent/near shade. In

HEALTH AND SAFETY

Mixing Mortar: Dry or damp cement and wet concrete/mortar can cause irritation and burns to eyes and skin. Suitable eye protection and PVC gloves should be worn when handling these materials. If contact with the skin does occur, wash with plenty of water. If contact with eyes occurs, irrigate with plenty of water. If irritation/ burning persists, seek immediate medical attention.

Cutting: The cutting of concrete, clay and stone products with high speed cutters produces dust. Inhalation of excessive amounts of dust over a long period of time may cause long-term health effects. Suitable eye protection (safety goggles) and respiratory protection (dust mask) should be used when cutting.

Handling: Most of our products are heavy. Some are very heavy. Appropriate handling precautions include wearing protective gloves and footwear and obtaining assistance when moving items weighing over 20kg is recommended.

certain circumstances, prolonged contact with wet leaves can result in staining of the paved area. Such contact should be avoided where ever practical. Certain common garden chemicals such as Ferrous Sulphate can stain paving. Please check the information given on the container holding the chemical. If chemicals are spilt on the paving remove immediately by rinsing away with clean water. Power-washing with high pressure equipment is not normally required. Should these methods be employed, the following precautions should be observed:

- Paving should be thoroughly swept to remove detritus (loose debris) that could act as an abrasive agent when moved by the force of a power jet.
- 2. A trial area should be tested before larger scale power-washing takes place.
- 3. No more than a medium pressure should be applied when washing paving.
- 4. The power-washing lance should be held at an oblique angle to the paving and at least 200mm (8") from the surface.
- If excess sand is washed from the joints during the washing exercise, it is important that the joints are re-sanded with similar materials upon completion.
- 6. If mortar joints between pavers are damaged during power washing they should be re-pointed.made good with fresh pointing as required, to maintain the integrity of the paving.

SUITABILITY/APPLICATION

The paving flags illustrated in this literature are primarily intended for domestic/landscape use only. Paving flags suitable for areas subject to intense foot traffic, i.e pedestrain precincts and commercial applications, etc are detailed in separate literature. This literature is available on request by telephoning 0800 367 937. For areas subject to vehicular overrun (driveways, parking areas, etc). block paving products are recommended. The block paving products illustrated in this literature are intended for pedestrain and light vehicular overrun applications (driveways and similar). For pavements subject to frequent overun of heavy vehicles, block paving from our commercial/specification range should be used. These are detailed in separate literature, copies of which are available on request by phoning 0800 367 937.

WestStone Care Instructions

GENERAL CARE

Sweep regularly with a stiff bristled broom to keep free from debris. During construction, cover the paved areas to protect against damage.

Protect your pavers against possible staining from mortar, oxides, cement and rust. Do not use high pressure cleaning apparatus to clean pavers. In all cases, attempt to clean a stain before it hardens or dries.

If a stain occurs, follow some simple steps: assess type of stain carefully before taking action (incorrect assessment of stain can cause the stain to be more dicult to remove). If the stain cannot be accurately assessed, conduct a trial process on a small portion of stained area to determine most appropriate action.

STAIN REMOVAL GUIDE		
PROBLEM	SUGGESTED CLEANING METHOD	
Efflorescence* (white powdery deposit)	Brush first with a stiff bristled broom. Then hose with clean water. If this doesn't work - wash with WESTSTONE-ACID-WASH as per label instructions. Weathering will eventually stop process from occuring	
Leaves, Bark, Algae, Food and Wine Stains	Use 10 part water to 1 part bleach, then wash down	
Chewing Gum	Freeze with dry ice and remove with a spatula	
Ivy Suckers	Apply a heat gun to the suckers until they go hard. Allow them to cool and dry, then scrub them off with a stiff bristled broom	

WESTSTONE DIMENSIONS POLICY FOR WETCAST RANGE ONLY

All dimensions given are nominal and subject to manufacturing tolerances. The quoted dimensions of our paving ranges are those normally attained when the slabs are arranged correctly spaced, i.e sizes are given inclusive of joints, which are typically 10mm. This policy enables you to simply plan the area covered and quantities required for your project without having to calculate a separate allowance for joint widths. Avoiding the complication of joint measurements is particularly helpful when planning random layouts. If precise dimensions are crucial, confirm the actual sizes and tolerances by measuring several samples of the product at your local stockist. Our policy is continuous innovation and product improvement. We therefore reserve the right to vary designs and specications without notice.

WEATHERING

It should be appreciated that with all products, natural curing, weathering and site conditions can cause shade variation to appear across the surface of individual paving units. This does not in any way affect the performance of the paving and any such variation will diminish over a period of time as the paving matures. Both natural stone and concrete products are aected by the action of sunlight and rainfall over time.

POINTING

We recommend that WESTSTONE-SWEEP-IN-GROUT (for Drycast) is used to fill pavings joints and should be completed within a few days of laying. This will provide a more permanent finish and ensure maximum surface drainage. It should be recognised that poor drainage (which includes the sub-base design) may result in water retention which can aect the weathering characteristics of a paved area.

*For wetcast pavers and Truestone use WESTSTONE EASY GROUT.

SALES TERMS AND CONDITIONS

Your signature on the freight docket is confirmation that the stock has been received in good condition. Credits cannot be issued where freight dockets have been signed.

IMPORTANT NOTICE PRODUCT LAID IS DEEMED TO BE ACCEPTED

It is important to understand that Weststone Products are created from natural materials to achieve a natural look. This means that every Weststone product captures nature's variety and beauty and any variations you see will not affect the performance of the product but rather will enhance a natural, weathered stone appearance. Natural variations as explained in the order confrmation and our brochure include: Colour variations, small chipping and texture variations including hairline fissures, crazing and texture variations typical of stone based materials. Any variations from the samples you have seen ensure your paving project is unique and special to your property.

IF SEALING IS REQUIRED, USE WESTSTONE ACID WASH AND WESTSTONE SEALER FOR BEST RESULTS!

CAUTION! To prevent marking - keep pavers stacked straight and dry until laid!! DO NOT use polystyrene as steppers!!

QUALITY: If for some reason, you are not completely satisfied with the quality of the product, please contact us immediately. We will not accept any claims for labour costs to remove or relay products that have been installed. Our warranty is limited to free replacement of product, deemed to be unsatisfactory by us, before installation takes place. Terms and conditions apply.

Please see website for more information.





SKU	Product	Size
200949	ALPINE FEATURE ROCK 1200+	1200mm+
200924	ALPINE FEATURE ROCK 400-600MM	400 - 600mm
200927	ALPINE FEATURE ROCK 600-900MM	600 - 900mm
200936	ALPINE FEATURE ROCK 900-1200MM	900 - 1200mm
200866	ALPINE NUGGETS LARGE 80-150MM - 1000KG	80 - 150mm
200873	ALPINE NUGGETS LARGE 80-150MM 25KG	80 - 150mm
319816	ALPINE NUGGETS MEDIUM 30-80MM 15KG	30 - 80mm
200819	ALPINE NUGGETS MEDIUM 30-80MM 25KG	30 - 80mm
200823	ALPINE NUGGETS MEDIUM 30-80MM BULK	30 - 80mm
200882	ALPINE SPLIT SCHIST 300-600MM - PER M2	300 - 600mm
209913	ALPINE STEPPING STONE 300-600MM	300 - 600mm
231052	ANTISLIP SEALER 5000 WESTSTONE 10L	
231051	ANTISLIP SEALER 5000 WESTSTONE 20L	
231054	ANTISLIP SEALER 5000 WESTSTONE 5L	
319810	AVALANCHE STONE 14-22MM 15KG	14 - 22mm
280015	AVALANCHE STONE 14-22MM 5KG	14 - 22mm
319807	AVALANCHE STONE SMALL 8-14MM 15 KG	8 - 14mm
280012	AVALANCHE STONE SMALL 8-14MM 5 KG	8 - 14mm
301921	BASE COURSE GAP 20 1000KG	
301924	BASE COURSE GAP 20 500KG	1
301927	BASE COURSE GAP 7 1000KG	
301930	BASE COURSE GAP 7 500KG	
319804	BLUE STONE 8-14MM 15 KG	8 - 14mm
301897	BLUE STONE SMALL 8-14MM 1000KG	8 - 14mm
301900	BLUE STONE SMALL 8-14MM 500KG	8 - 14mm
258527	BULLNOSE 300 x 300 x 40 NATURAL	300 x 300 x 40mm
258551	BULLNOSE 450X450X40 CREAM	450 x 450 x 40mm
258548	BULLNOSE 450X450X40 DESERT	450 x 450 x 40mm
258542	BULLNOSE 450X450X40 NATURAL	450 x 450 x 40mm
258554	BULLNOSE 450X450X40 SANDSTONE	450 x 450 x 40mm
258545	BULLNOSE 450X450X40 SLATE GREY	450 x 450 x 40mm
258594	BULLNOSE 600 X 600 X40 SANDSTONE	600 x 600 x 40mm
258570	BULLNOSE 600X300X40 CREAM	600 x 300 x 40mm
258563	BULLNOSE 600X300X40 DESERT	600 x 300 x 40mm
258557	BULLNOSE 600X300X40 NATURAL	600 x 300 x 40mm
258573	BULLNOSE 600X300X40 SANDSTONE	600 x 300 x 40mm
258560	BULLNOSE 600X300X40 SLATE GREY	600 x 300 x 40mm
258591	BULLNOSE 600X600X40 CREAM	600 x 600 x 40mm
258586	BULLNOSE 600X600X40 DESERT	600 x 600 x 40mm
258576	BULLNOSE 600X600X40 NATURAL	600 x 600 x 40mm
258583	BULLNOSE 600X600X40 SLATE GREY	600 x 600 x 40mm
230977	CLASSIC 300X300X40 CREAM	300 x 300 x 37mm
230980	CLASSIC 300X300X40 DESERT	300 x 300 x 37mm
230986	CLASSIC 300X300X40 NATURAL	300 x 300 x 37mm
230983	CLASSIC 300X300X40 SLATE GREY	300 x 300 x 37mm
301811	CLASSIC 450X450X40 CREAM	450 x 450 x 37mm
230991	CLASSIC 450X450X40 DESERT	450 x 450 x 37mm
230994	CLASSIC 450X450X40 NATURAL	450 x 450 x 37mm
301822	CLASSIC 450X450X40 SLATE GREY	450 x 450 x 37mm
302434	CLASSIC 450X450X40 TERRACOTTA	450 x 450 x 37mm
237525	CLASSIC 600X300X40 CREAM	600 x 300 x 37mm
254771	CLASSIC 600X300X40 NATURAL	600 x 300 x 37mm
247500	CLASSIC 600X300X40 SLATE GREY	600 x 300 x 37mm
237492	CLASSIC 600X600X40 SLATE GREY	600 x 600 x 37mm

SKU	Product	Size
301827	CLASSIC 600X600X40 CREAM	600 x 600 x 37mm
247497	CLASSIC 600X600X40 DESERT	600 x 600 x 37mm
290783	CLASSIC 600X600X40 NATURAL	600 x 600 x 37mm
289660	CLASSIC PROJECT PACK CREAM	6.5 m2
289665	CLASSIC PROJECT PACK DESERT	6.5 m2
289670	CLASSIC PROJECT PACK NATURAL	6.5 m2
289673	CLASSIC PROJECT PACK SANDSTONE	6.5 m2
289657	CLASSIC PROJECT PACK SLATE GREY	6.5 m2
271362	CONTEMPORARY 300X300X40 CREAM	300 x 300 x 37mm
271367	CONTEMPORARY 300X300X40 GREY	300 x 300 x 37mm
301805	CONTEMPORARY 300X300X40 NATURAL	300 x 300 x 37mm
230967	CONTEMPORARY 450X450X40 CREAM	450 x 450 x 37mm
230974	CONTEMPORARY 450X450X40 DESERT	450 x 450 x 37mm
301819	CONTEMPORARY 450X450X40 GREY	450 x 450 x 37mm
301800	CONTEMPORARY 450X450X40 NATURAL	450 x 450 x 37mm
237511	CONTEMPORARY 450X450X40 SANDSTONE	450 x 450 x 37mm
271359	CONTEMPORARY 600X300X40 CREAM	600 x 300 x 37mm
237514	CONTEMPORARY 600X300X40 DESERT	600 x 300 x 37mm
237522	CONTEMPORARY 600X300X40 GREY	600 x 300 x 37mm
237519	CONTEMPORARY 600X300X40 NATURAL	600 x 300 x 37mm
237495	CONTEMPORARY 600X600X40 CREAM	600 x 600 x 37mm
237500	CONTEMPORARY 600X600X40 DESERT	600 x 600 x 37mm
301815	CONTEMPORARY 600X600X40 GREY	600 x 600 x 37mm
301797	CONTEMPORARY 600X600X40 NATURAL	600 x 600 x 37mm
237505	CONTEMPORARY 600X600X40 SANDSTONE	600 x 600 x 37mm
327236	CONTEMPORARY 800X400X40 CREAM	800 x 400 x 37mm
327241	CONTEMPORARY 800X400X40 DESERT	800 x 400 x 37mm
327230	CONTEMPORARY 800X400X40 NATURAL	800 x 400 x 37mm
327246	CONTEMPORARY 800X400X40 SANDSTONE	800 x 400 x 37mm
327227	CONTEMPORARY 800X400X40 SLATE	800 x 400 x 37mm
327233	CONTEMPORARY 800X400X40 TERRACOTTA	800 x 400 x 37mm
289679	CONTEMPORARY PROJECT PACK CREAM	6.5 m2
289684	CONTEMPORARY PROJECT PACK DESERT	6.5 m2
289689	CONTEMPORARY PROJECT PACK NATURAL	6.5 m2
289692	CONTEMPORARY PROJECT PACK SANDSTONE	6.5 m2
289676	CONTEMPORARY PROJECT PACK SLATE GREY	6.5 m2
251933	CREAM STONE 6-12MM 15KG	6 - 12mm
8907790	EASYFLOW ML 60MM ACORN	218 x118 x 60mm
8907785	EASYFLOW ML 60MM ASH	218 x118 x 60mm
8907787	EASYFLOW ML 60MM Autumn Blend	218 x118 x 60mm
8907792	EASYFLOW ML 60MM Blanco	218 x118 x 60mm
8907795	EASYFLOW ML 60MM CHARCOAL	218 x118 x 60mm
8907797	EASYFLOW ML 60MM Charcoal Blend	218 x118 x 60mm
8907800	EASYFLOW ML 60MM Coromandel	218 x118 x 60mm
8907802	EASYFLOW ML 60MM EARTH BLEND	218 x118 x 60mm
8907807	EASYFLOW ML 60MM Midnight	218 x118 x 60mm
8907810	EASYFLOW ML 60MM Midnight EASYFLOW ML 60MM Slate Grey	218 x118 x 60mm
8907812	EASYFLOW ML 60MM Terracotta	218 x118 x 60mm
8907805	EASYFLOW ML 60MM WHEAT	218 x118 x 60mm
301854	GARDEN KERB RIGHT ANGLE NATURAL	250 x 100 x 50mm
301854	GARDEN KERB RIGHT ANGLE NATURAL (REVERSE)	250 x 100 x 50mm
301857	GLACIER STONE SML (8-14MM) - 1 TONNE BAG	250 x 100 x 50mm 8 - 14mm
301884	GLACIER STONE SML (8-14MM) - 1 TONNE BAG GLACIER STONE SML (8-14MM) - 500KG	8 - 14mm
JU1004	GLAGIEN STONE SIVIE (0-141VIIVI) - SUUNG	0 - 1411111

WestStone Product Sku List 2017.7

SKU	Product	Size
231062	GLOSS SEALER 5000 WESTSTONE 20L	
231065	GLOSS SEALER 5000 WESTSTONE 5L	
301889	GOLDEN STONE SMALL 7-12MM 1000KG	7 - 12mm
301894	GOLDEN STONE SMALL 7-12MM 500KG	7 - 12mm
319799	GREY STONE MED 20-40MM 15 KG	20 - 40mm
280009	GREY STONE MED 20-40MM 5KG	20 - 40mm
301918	GREY STONE SMALL 7-13MM 500KG	7 - 13mm
301915	GREY STONE SML (7-13MM) - 1000KG	7 - 13mm
319796	GREY STONE SML 7-13MM 15KG	7 - 13mm
260068	KERBS DRIVEWAY 255X120 ASH	255 x 120 x 75mm
260073	KERBS DRIVEWAY 255X120 CHARCOAL	225 x 120 x 75mm
260082	KERBS DRIVEWAY 550X190 ASH	550 x 190 x 75mm
260085	KERBS DRIVEWAY 550X190 CHARCOAL	550 x 190 x 75mm
260076	KERBS DRIVEWAY 600X120 ASH	600 x 120 x 75mm
260079	KERBS DRIVEWAY 600X120 CHARCOAL	600 x 120 x 75mm
230937	LANDSCAPE EDGE MED CURVE 500MM NATURAL	500 X 100 X 50
230937	LANDSCAPE EDGE OPEN CURVE 500MM NATURAL	500 x 100 x 50mm
230932	LANDSCAPE EDGE RIGHT ANGLE 250X100MM NATURAL	250 x 100 x 50mm
301848	LANDSCAPE EDGE STRAIGHT 500MM NATURAL	500 x 100 x 50mm
301853	LANDSCAPE KERB STRAIGHT 500MM NATURAL	500 x 100 x 50mm
200842	LANDSCAPE TASMAN FLAT LARGE 80-150MM - 1000KG	80 - 150mm
200853	LANDSCAPE TASMAN FLAT MEDIUM STONES - 1000KG	30 - 80mm
301836	LANDSCAPE TREE RING 300MM FULL RND NATURAL	300 x 50mm
8907835	LANDSCAPE WALL CAP 270x270x40 Autumn Blend	270 x 270 x 40mm
8907833	LANDSCAPE WALL CAP 270x270x40 Charcoal	270 x 270 x 40mm
8907840	LANDSCAPE WALL CAP 270x270x40 CHarcoal BLEND	270 x 270 x 40mm
8907842	LANDSCAPE WALL CAP 270x270x40 Earth Blend	270 x 270 x 40mm
8907847	LANDSCAPE WALL CAP 270x270x40 Terracotta	270 x 270 x 40mm
8907845	LANDSCAPE WALL CAP 270x270x40 WHEAT	270 x 270 x 40mm
8907820	LANDSCAPE WALL SPLIT 270X270X80 Autumn Blend	270 x 270 x 80mm
8907822	LANDSCAPE WALL SPLIT 270X270X80 CHARCOAL	270 X 270 X 80mm
8907823	LANDSCAPE WALL SPLIT 270X270X80 CHARCOAL BLEND	270 x 270 x 80mm
8907827	LANDSCAPE WALL SPLIT 270X270X80 Earth Blend	270 x 270 x 80mm
8907832	LANDSCAPE WALL SPLIT 270X270X80 Terracotta	270 x 270 x 80mm
8907830	LANDSCAPE WALL SPLIT 270X270X80 WHEAT	270 x 270 x 80mm
258609	LONDON PAVER 230X190X40 ACORN	230 x 190 x 40mm
258600	LONDON PAVER 230X190X40 ASH	230 x 190 x 40mm
8907892	LONDON PAVER 230X190X40 Autumn Blend	230 x 190 x 40mm
8907895	LONDON PAVER 230X190X40 BLANCO	230 x 190 x 40mm
258597	LONDON PAVER 230X190X40 CHARCOAL	230 x 190 x 40mm
8907897	LONDON PAVER 230X190X40 Charcoal Blend	230 x 190 x 40mm
8907900	LONDON PAVER 230X190X40 COROMANDEL	230 x 190 x 40mm
8907902	LONDON PAVER 230X190X40 EARTH BLEND	230 x 190 x 40mm
258603	LONDON PAVER 230X190X40 TERRACOTTA	230 x 190 x 40mm
258606	LONDON PAVER 230X190X40 WHEAT	230 x 190 x 40mm
258632	LONDON PAVER 230X190X60 ACORN	230 x 190 x 60mm
258619	LONDON PAVER 230X190X60 ASH	230 x 190 x 60mm
8907905	LONDON PAVER 230X190X60 Autumn Blend	230 x 190 x 60mm
8907907	LONDON PAVER 230X190X60 BLANCO	230 x 190 x 60mm
258616	LONDON PAVER 230X190X60 CHARCOAL	230 x 190 x 60mm
8907910	LONDON PAVER 230X190X60 Charcoal Blend	230 x 190 x 60mm
8907912	LONDON PAVER 230X190X60 COROMANDEL	230 x 190 x 60mm
8907915	LONDON PAVER 230X190X60 EARTH BLEND	230 x 190 x 60mm
8907917	LONDON PAVER 230X190X60 MIDNIGHT	230 x 190 x 60mm

SKU	Product	Size
8907920	LONDON PAVER 230X190X60 SLATE GREY	230 x 190 x 60mm
258624	LONDON PAVER 230X190X60 TERRACOTTA	230 x 190 x 60mm
258629	LONDON PAVER 230X190X60 WHEAT	230 x 190 x 60mm
8907955	MADRID 270 X 270 X 60 SLATE GREY	270 x 270 x 60mm
258744	MADRID 270X270X40 ACORN	270 x 270 x 40mm
258727	MADRID 270X270X40 ASH	270 x 270 x 40mm
8907922	MADRID 270x270x40 Autumn Blend	270 x 270 x 40mm
8907925	MADRID 270X270X40 BLANCO	270 x 270 x 40mm
258724	MADRID 270X270X40 CHARCOAL	270 x 270 x 40mm
8907927	MADRID 270X270X40 Charcoal Blend	270 x 270 x 40mm
8907930	MADRID 270X270X40 COROMANDEL	270 x 270 x 40mm
8907932	MADRID 270X270X40 EARTH BLEND	270 x 270 x 40mm
8907935	MADRID 270X270X40 MIDNIGHT	270 x 270 x 40mm
8907937	MADRID 270X270X40 SLATE GREY	270 x 270 x 40mm
258732	MADRID 270X270X40 TERRACOTTA	270 x 270 x 40mm
258735	MADRID 270X270X40 WHEAT	270 x 270 x 40mm
258721	MADRID 270X270X60 ACORN	270 x 270 x 60mm
258708	MADRID 270X270X60 ASH	270 x 270 x 60mm
8907940	MADRID 270X270X60 Autumn Blend	270 x 270 x 60mm
8907942	MADRID 270X270X60 BLANCO	270 x 270 x 60mm
258705	MADRID 270X270X60 CHARCOAL	270 x 270 x 60mm
8907945	MADRID 270X270X60 Charcoal Blend	270 x 270 x 60mm
8907947	MADRID 270X270X60 COROMANDEL	270 x 270 x 60mm
8907950	MADRID 270X270X60 EARTH BLEND	270 x 270 x 60mm
8907952	MADRID 270X270X60 MIDNIGHT	270 x 270 x 60mm
258711	MADRID 270X270X60 TERRACOTTA	270 x 270 x 60mm
258716	MADRID 270X270X60 WHEAT	270 x 270 x 60mm
319822	MOUNTAIN CREEK STONE 8-14MM 15KG	8 - 14mm
258685	NAPOLI 60MM ACORN	60mm
258674	NAPOLI 60MM ASH	60mm
8907957	NAPOLI 60MM Autumn Blend	60mm
8907960	NAPOLI 60MM Blanco	60mm
258669	NAPOLI 60MM CHARCOAL	60mm
8907962	NAPOLI 60MM Charcoal Blend	60mm
8907965	NAPOLI 60MM COROMANDEL	60mm
8907967	NAPOLI 60MM EARTH BLEND	60mm
8907970	NAPOLI 60MM Midnight	60mm
8907972	NAPOLI 60MM SLATE GREY	60mm
258677	NAPOLI 60MM TERRACOTTA	60mm
258682	NAPOLI 60MM WHEAT	60mm
200900	NATURAL FEATURE ROCK 400-600MM	400 - 600mm
200905	NATURAL FEATURE ROCK 600-900MM	600 - 900mm
230293	NATURES BLEND 8-14MM 15KG	8 - 14mm
319813	NZ WHITE STONE MEDIUM 6-16MM 15KG	6 - 16mm
280018	NZ WHITE STONE MEDIUM 6-16MM 5KG	6 - 16mm
319819	OCEAN FLAT STONE 30-80MM 15KG	30 - 80mm
8907980	PARIS PAVER 230 X 115 X 40 EARTH BLEND	230 x 115 x 40mm
8907982	PARIS PAVER 230 X 115 X 40 SLATE GREY	230 x 115 x 40mm
8907987	PARIS PAVER 230 X 115 X 60 BLANCO	230 x 115 x 60mm
8907992	PARIS PAVER 230 X 115 X 60 COROMANDEL	230 x 115 x 60mm
8907995	PARIS PAVER 230 X 115 X 60 EARTH BLEND	230 x 115 x 60mm
8907997	PARIS PAVER 230 X 115 X 60 MIDNIGHT	230 x 115 x 60mm
	PARIS PAVER 230 X 115 X 60 SLATE GREY	
8908000	FARIS FAVER 230 X 113 X 00 SLATE GRET	230 x 115 x 60mm





0//11

SKU	Product	Size
258649	PARIS PAVER 230X115X40 ACORN	230 x 115 x 40mm
258640	PARIS PAVER 230X115X40 ASH	230 x 115 x 40mm
258637	PARIS PAVER 230X115X40 CHARCOAL	230 x 115 x 40mm
8907977	PARIS PAVER 230X115X40 CHARCOAL BLEND	230 x 115 x 40mm
258643	PARIS PAVER 230X115X40 TERRACOTTA	230 x 115 x 40mm
258646	PARIS PAVER 230X115X40 WHEAT	230 x 115 x 40mm
258666	PARIS PAVER 230X115X60 ACORN	230 x 115 x 60mm
258655	PARIS PAVER 230X115X60 ASH	230 x 115 x 60mm
8907985	PARIS PAVER 230X115X60 Autumn Blend	230 x 115 x 60mm
258652	PARIS PAVER 230X115X60 CHARCOAL	230 x 115 x 60mm
8907990	PARIS PAVER 230X115X60 Charcoal Blend	230 x 115 x 60mm
258660	PARIS PAVER 230X115X60 TERRACOTTA	230 x 115 x 60mm
258663	PARIS PAVER 230X115X60 WHEAT	230 x 115 x 60mm
8908007	PARIS SETT 230 X 115 X 60 ACORN	230 x 115 x 60mm
8908002	PARIS SETT 230 X 115 X 60 ASH	230 x 115 x 60mm
8908005	PARIS SETT 230 X 115 X 60 AUTUMN BLEND	230 x 115 x 60mm
8908010	PARIS SETT 230 X 115 X 60 BLANCO	230 x 115 x 60mm
8908012	PARIS SETT 230 X 115 X 60 CHARCOAL	230 x 115 x 60mm
8908015	PARIS SETT 230 X 115 X 60 Charcoal Blend	230 x 115 x 60mm
8908017	PARIS SETT 230 X 115 X 60 Coromandel	230 x 115 x 60mm
8908020	PARIS SETT 230 X 115 X 60 Earth Blend	230 x 115 x 60mm
8908025	PARIS SETT 230 X 115 X 60 Midnight	230 x 115 x 60mm
8908027	PARIS SETT 230 X 115 X 60 Slate Grey	230 x 115 x 60mm
8908031	PARIS SETT 230 X 115 X 60 Terracotta	230 x 115 x 60mm
8908022	PARIS SETT 230 X 115 X 60 WHEAT	230 x 115 x 60mm
258536	PAVER BULLNOSE 300X300X40 CREAM	300 x 300 x 40mm
258533	PAVER BULLNOSE 300X300X40 DESERT	300 x 300 x 40mm
258530	PAVER BULLNOSE 300X300X40 SLATE GREY	300 x 300 x 40mm
8907855	PAVER DECO 542 X 270 X 40 EARTH BLEND	542 x 270 x 40mm
260065	PAVER DECO 542X270X40 ACORN	542 x 270 x 40mm
260056	PAVER DECO 542X270X40 ASH	542 x 270 x 40mm
8907850	PAVER DECO 542X270X40 Autumn Blend	542 x 270 x 40mm
285937	PAVER DECO 542X270X40 BLANCO	542 x 270 x 40mm
260054	PAVER DECO 542X270X40 CHARCOAL	542 x 270 x 40mm
8907852	PAVER DECO 542X270X40 Charcoal Blend	542 x 270 x 40mm
285944	PAVER DECO 542X270X40 COROMANDEL	542 x 270 x 40mm
285930	PAVER DECO 542X270X40 MIDNIGHT	542 x 270 x 40mm
260059	PAVER DECO 542X270X40 TERRACOTTA	542 x 270 x 40mm
260062	PAVER DECO 542X270X40 WHEAT	542 x 270 x 40mm
8907860	PAVER DECO HONED 542X270X40 ACORN	542 x 270 x 40mm
8907857	PAVER DECO HONED 542X270X40 Autumn Blend	542 x 270 x 40mm
8907862	PAVER DECO HONED 542X270X40 Charcoal Blend	542 x 270 x 40mm
8907865	PAVER DECO HONED 542X270X40 Earth Blend	542 x 270 x 40mm
8907867	PAVER DECO HONED 542X270X40 WHEAT	542 x 270 x 40mm
285925	PONGA LOG 2 METERS	2m
319793	RUSTIC STONE LGE 25-80MM 15KG	25 - 80mm
319790	RUSTIC STONE MED 12-25MM 15KG	12 - 25mm
280004	RUSTIC STONE MED 12-25MM 5KG	12 - 25mm
319787	RUSTIC STONE SML 7-12MM 15KG	7 - 12mm
200883	SCHIST CRUSHED STONE MEDIUM 20-40MM 1000KG	20-40MM
319825	SCHIST CRUSHED STONE MEDIUM 20-40MM 15KG	20 - 40mm
200891	SCHIST STONE WATERWORN STEPPERS 800 - 1000 mm	800 - 1200mm
302431	SPLIT STONE 450X450X40 SLATGREY	450 x 450 x 37mm
301808	SPLIT STONE 450X450X40 CREAM	450 x 450 x 37mm

SKU	Product	Size
301845	STEPPING STONE 300MM RND NATURAL	300mm Diameter
200896	STEPPING STONE 500-700MM	500 - 600mm
237508	STIPPLE 600X600X40 GREY	600 x 600 x 37mm
301830	STIPPLE 600X600X40 NATURAL	600 x 600 x 37mm
231068	STONE & CONCRETE SEALER WESTSTONE 10L	
231075	STONE & CONCRETE SEALER WESTSTONE 20L	
231078	STONE & CONCRETE SEALER WESTSTONE 5L	
301907	STONE EBONY SML (8-14MM) - 1000KG	8 - 14mm
301912	STONE EBONY SML (8-14MM) - 500KG	8 - 14mm
156743	STONE FLAT GREY LRG 150-300MM 1000KG	150 - 300mm
156705	STONE HARI HARI WALLING 4300 (1 TONNE)	150mm
156702	STONE NATURAL SPLIT PAVING PER TONNE	300 - 600mm
200861	STONE TASMAN FLAT 30-80MM (25kg)	30 - 80mm
200846	STONE TASMAN FLAT 80-150MM (25kg)	80 - 150mm
156700	STONE WAITAHA CORNER 4200 (1 TONNE)	150mm
200890	STONE WAITAHA CRUSHED 20-40MM (25kg)	20 - 40mm
156695	STONE WALLING 4100 (1 TONNE)	150mm
301865	STONEWALL CORNER GREY	300 x 200 x 100mm
327267	TRAVERTINE PAVERS W/STONE 600 x 450 x 37 CREAM	600 x 450 x 37mm
327264	TRAVERTINE PAVERS W/STONE 600 x 450 x 37 DESERT	600 x 450 x 37mm
327252	TRAVERTINE PAVERS W/STONE 600 x 450 x 37 NATRL	600 x 450 x 37mm
327255	TRAVERTINE PAVERS W/STONE 600 x 450 x 37 SANDSTONE	600 x 450 x 37mm
327258	TRAVERTINE PAVERS W/STONE 600 x 450 x 37 SLATE	600 x 450 x 37mm
327261	TRAVERTINE PAVERS W/STONE 600 x 450 x 37 TERRA	600 x 450 x 37mm
301833	TREE RING 300MM 1/2 RND NATURAL	300 x 50mm
301839	TREE RING 450MM 1/2 SQUARE NATURAL	450 x 50mm
301842	TREE RING 450MM FULL SQUARE NATURAL	450 x 450 x 50mm
230922	TREE RING 450MM HALF RND NATURAL	450 x 50mm
8908033	TURF PAVERS 400 x 400 x 80 ASH	400 x 400 x 80
258700	VIENNA 400X400X40 ACORN	400 x 400 x 40mm
258691	VIENNA 400X400X40 ASH	400 x 400 x 40mm
8907870	Vienna 400x400x40 Autumn Blend	400 x 400 x 40mm
8904925	VIENNA 400X400X40 BLANCO	400 x 400 x 40mm
258688	VIENNA 400X400X40 CHARCOAL	400 x 400 x 40mm
8907872	VIENNA 400X400X40 Charcoal Blend	400 x 400 x 40mm
8901212	VIENNA 400X400X40 COROMANDEL	400 x 400 x 40mm
8907875	VIENNA 400X400X40 EARTH BLEND	400 x 400 x 40mm
8904927	VIENNA 400X400X40 MIDNIGHT	400 x 400 x 40mm
258694	VIENNA 400X400X40 TERRACOTTA	400 x 400 x 40mm
258697	VIENNA 400X400X40 WHEAT	400 x 400 x 40mm
8907880	Vienna Honed 400x400x40 ACORN	400 x 400 x 40mm
8907877	Vienna Honed 400x400x40 Autumn Blend	400 x 400 x 40mm
8907882	Vienna Honed 400x400x40 Charcoal Blend	400 x 400 x 40mm
8907885	Vienna Honed 400x400x40 Earth Blend	400 x 400 x 40mm
8907890	Vienna Honed 400x400x40 Terracotta	400 x 400 x 40mm
8907887	Vienna Honed 400x400x40 WHEAT	400 x 400 x 40mm
318972	WAITAHA STEPPING STONE 300-500MM	300 - 500mm
231049	WESTSTONE ACID WASH 4 LITRE	
294768	WESTSTONE EASY GROUT BUFF 12.5KG	
294765	WESTSTONE EASY GROUT MID GREY 12.5KG	



dedicated to the manufacture and supply of top quality, world class landscape and building products.

We are a New Zealand owned and operated company

Please browse the website where you will find almost everything you need to transform your home inside and out.

House bricks, indoor tiles, driveways, patio's, stone pillars and features, stone walls, retaining walls, decorative stone and pebbles and more....

You can find our displays and products at every Bunnings Store in New Zealand. If your local store doesn't stock your desired product, simply ask them to order it in for you!

We look forward to helping you transform your world.....

Best Regards The Team at WestStone!









QUALITY LANDSCAPE PRODUCTS

UPLOAD IMAGES OF YOUR PROJECT AND GO IN MONTHLY PRIZE DRAW TO WIN THIS GIANT HAMPER!



PHOTO'S WE LOVE TO SEE ARE:

- 1. Before and after pics
- 2. Completed project pics
- 3. Stage by stage pic's

4. Pics showing overall house and landscape including Weststone and other products
5. Combinations or single pic's of bricks, pavers, edging, tree rings, pebbles, schist, retainers rocks etc..

UPLOAD NOW! -

Go to www.weststone.co.nz/paving-tiles-house

lame:	Address:	
mail:	Home Phone:	Cellphone:
pe of paver or product	Texture:	Store:
	Size:	Suburb:
	Colour:	City:
EASE STAPLE YOUR PROOF O	F PURCHASE RECEIPT	THANK YOU FOR YOUR COMMENTS
For what purpose was the product purchased: Patio Driveway Pool Area Pathway Indoors Garden I		Please cut the warranty slip and post within 21 days to:
ow clear did you find the instruct asy to follow Adequate	ions?	Weststone PO Box 12172, Chartwell Hamilton 3248 New Zealand
re there any improvements you f	eel could be made to our product or instructions?	We will post your warranty certificate to you.

weststone.co.nz | 0800 367 937 | Transforming your world...